

2MP IP Motorized IR Bullet Camera

80M IR, PoE, Audio, 2.8-12mm



SP-C2UN
Vivid Pro Series

KEY FEATURES

- Metal+Plastic Housing
- Motorized Lens 2.8 ~ 12mm
- Up to 1920x1080@30fps
- S+265/H.265/H.264
- Min. Illumination Color: 0.02Lux@F1.6
- Smart IR, IR Range: 80m
- Built-in Mic, Support max 512G Micro SD Card
- Operating Conditions -30°C ~ 60°C , 0~95% RH
- DC12V, POE(802.3af)
- IP67




SPECIFICATIONS

Camera	
Image Sensor	1/2.8"CMOS
Min. Illumination	Color:0.02Lux@(F1.6,AGC ON),B/W:0Lux with IR
Shutter Time	1s-1/100000s
Day&Night	IR-cut filter with auto switch (ICR)
WDR	DWDR
S/N	>39dB
Angle Adjustment	0-360°; 0-90°; 0-360°
Lens	
Lens Type	Motorized
Focal Length	2.8-12mm
Lens Mount	Φ 14
Aperture Range	F1.6,Fixed
Field of View	108.1°-31.3°(H); 58.1°-17.6°(V); 124.6°-35.9°(D)
DORI Distance	W: Detect: 38.6m Observe: 15.3m Recognize: 7.7m Identify: 3.8m T: Detect: 165.5m Observe: 65.6m Recognize: 33.1m Identify: 16.5m
Illuminator	
IR LEDs	4
IR Distance	80m
Wavelength	850nm
Compression Standard	
Video Compression	S+265/H.265/H.264B/H.264M/H.264H
Video Bit Rate	32k-4Mbps
Audio Compression	G.711A/G.711U
Audio Sampling Rate	8kHz

Image	
Max. Resolution	1920x1080@30fps
Main Stream	PAL: 25fps(1920x1080, 1280x720, 640x480, 704x576) NTSC: 30fps(1920x1080, 1280x720, 640x480, 704x480)
Sub Stream	PAL: 25fps(704x576, 704x288, 640x360, 352x288) NTSC: 30fps(704x480, 704x240, 640x360, 352x240)
BLC	Yes
HLC	Yes
AGC	Yes
3D DNR	Yes
White Balance	Auto/Semi-auto/Manual/Sunny/Natural light/Warm light/Sodium lamp/ Incandescent lamp/Locked white balance
ROI	8 regions
OSD	1regions; 16*16/32*32/48*48
Privacy Mask	4 regions
Defog	Yes
Feature	
Alarm Trigger	Motion Detection; Mask Alarm; Disk Full, Disk R/W Error; IP Address Conflict
Linkage Method	Trigger Recording; Trigger Capture; notify Surveillance Center

Network	
ANR	ANR
Protocols	HTTP;HTTPS;TCP/IP;UDP;UPnP;ICMP;DHCP;DNS;DDNS;Easy DDNS;NTP;QoS;IPv4;SSH;Unicast;RTSP;FTP
System Compatibility	P2P(Mutually exclusive with Profile G); Onvif Profile S/T; CGI; MIL STONE
Remote Connection	≤2
PC CMS Software	Secureeye Smart Client
Mobile APP	Phoenix Pro
Web	IE10+; Firefox52+; Edge89+; Safari11+; Chrome57+
Interface	
Communication Interface	1 RJ45 10M/100M self adaptive Ethernet port
Built-In Mic	Yes
Reset Button	Yes(built-in)
On-board storage	Built-in Micro SD card slot, up to 512 GB
General	
Web Client Language	English/Spanish/Italian/Turkish French/Polish/German/Ukrainian
Operating Temperature	-30°C-60°C
Operating Humidity	0-95%
Storage Temperature	-30°C-60°C
Storage Humidity	0-95%(non-condensing)
Power Supply	DC12V±25%, MAX 6.5W; POE 802.3af, MAX 7W
Protection	Surge Protection 2000V; Lightning Proof 6000V; IP67
Boundary Dimensions	204(L)83.6(W)76.2(H)mm
Package Dimension	215(L)95(W)120(H)mm
Gross Weight	0.57Kg
Net Weight	0.42Kg

DIMENSIONS (Unit: mm)

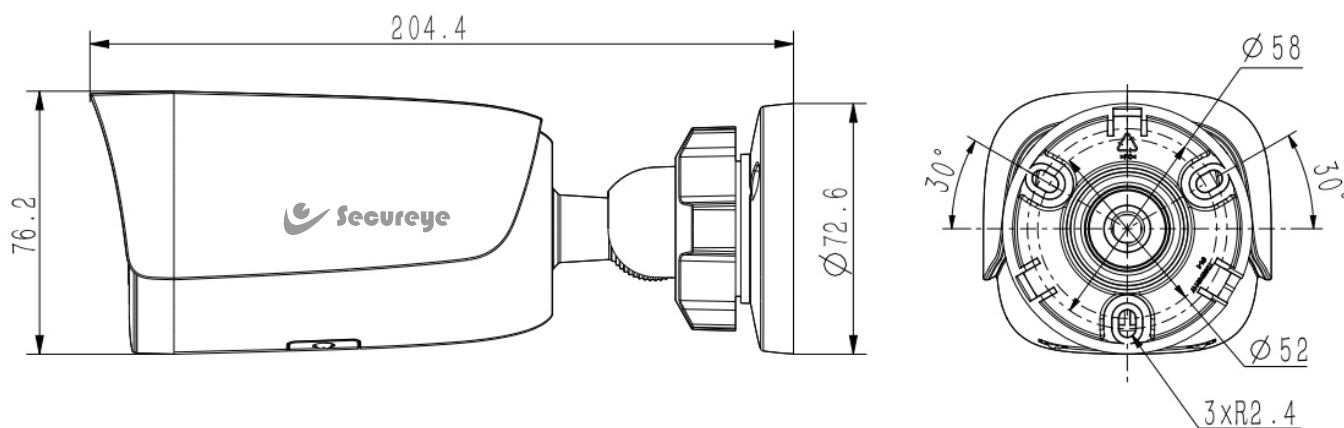

ACCESSORIES

