

4MP IP Bullet Camera

30M IR, PoE, Audio, 4mm



SP-C4QN-I3

Vivid Pro Series

KEY FEATURES

- Metal+Plastic Housing
- Up to 2560x1440@20fps
- S+265/H.265/H.264
- Min. Illumination Color: 0.02Lux@F1.6
- Smart IR, IR Range: 30m
- Built-in Mic
- Operating Conditions -30°C ~ 60°C, 0 ~ 95% RH
- POE, IP67




SPECIFICATIONS

Camera	
Image Sensor	1/3"CMOS
Min. Illumination	Color:0.02Lux@(F1.6,AGC ON),B/W:0Lux with IR
Shutter Time	1s-1/100000s
Day&Night	IR-cut filter with auto switch (ICR)
WDR	DWDR
S/N	>40dB
Angle Adjustment	0-360°; 0-80°; 0-360°
Lens	
Lens Type	Fixed
Focal Length	4mm
Lens Mount	M12
Aperture Range	F1.6,Fixed
Field of View	77.6°(H); 44.1°(V); 89.3°(D)
DORI Distance	Detect: 80.0m Observe: 31.8m Recognize: 16.0m Identify: 8.0m
Illuminator	
IR LEDs	2
IR Distance	30m
Wavelength	850nm
Compression Standard	
Video Compression	S+265/H.265/H.264B/H.264M/H.264H
Video Bit Rate	32k-4Mbps
Audio Compression	G.711A/G.711U
Audio Sampling Rate	8kHz

Image	
Max. Resolution	2560x1440@20fps
Main Stream	PAL: 20fps(2560x1440, 2304x1296, 1920x1080, 1280x720,) NTSC: 20fps(2560x1440, 2304x1296, 1920x1080, 1280x720)
Sub Stream	PAL: 20fps(704x576, 704x288, 352x288, 640x360) NTSC: 30fps(704x480, 704x240, 352x240, 642x360)
BLC	Yes
HLC	Yes
AGC	Yes
3D DNR	Yes
White Balance	Auto/Semi-auto/Manual/Sunny/Natural light/Warm light/Sodium lamp/ Incandescent lamp/Locked white balance
OSD	1 regions; 16*16/32*32/48*48/64*64
Privacy Mask	4 regions
Defog	Yes
Feature	
Alarm Trigger	Motion Detection; IP Address Conflict
Linkage Method	Trigger Capture
Network	
Protocols	HTTP; TCP/IP; UDP; ICMP; DHCP; DNS; NTP; IPV4; Telnet; Unicast
System Compatiibity	Onvif Profile S/T; CGI; MIL STONE
Remote Connection	≤ 2
PC CMS Software	Secureeye Smart Client
Mobile APP	Phoenix Pro
Web	IE10+; Firefox52+; Edge89+; Safari11+; Chrome57+

Interface	
Communication Interface	1 RJ45 10M/100M Self Adaptive Ethernet Port
Built-In Mic	Yes
General	
Web Client Language	English/Spanish/Italian/Turkish/ French/Polish/German/Ukrainian
Operating Temperature	-30°C ~ 60C°
Operating Humidity	0 ~ 95%
Storage Temperature	-30°C ~ 60C°
Storage Humidity	0-95%(non-condensing)
Power Supply	POE 802.3af; MAX 6W
Protection	Surge protection 2000V; Lightning proof 6000V
Boundary Dimensions	164(L)73(W)73(H)mm
Package Dimensions	180(L)90(W)95(H)mm
GrossWeight	0.3Kg
NetWeight	0.22Kg

DIMENSIONS (Unit: mm)

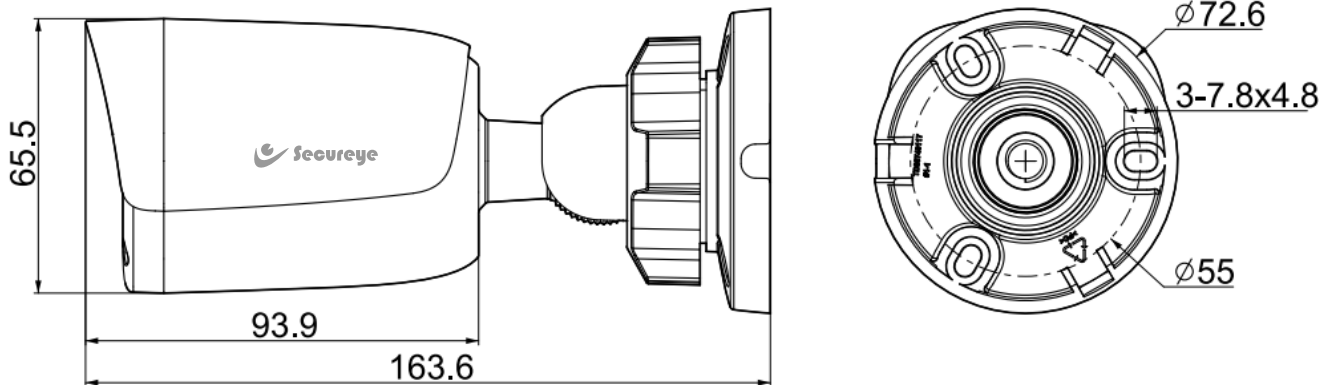

ACCESSORIES

